


SUSPENSIONS

Introduction to **Type 11A**





Double T-Rail Flush Mount for D-Shaped Ducts

- Quick and easy installation for flat ceilings
- Inexpensive
- RapidSlider is used to fix the duct to the T-Rail

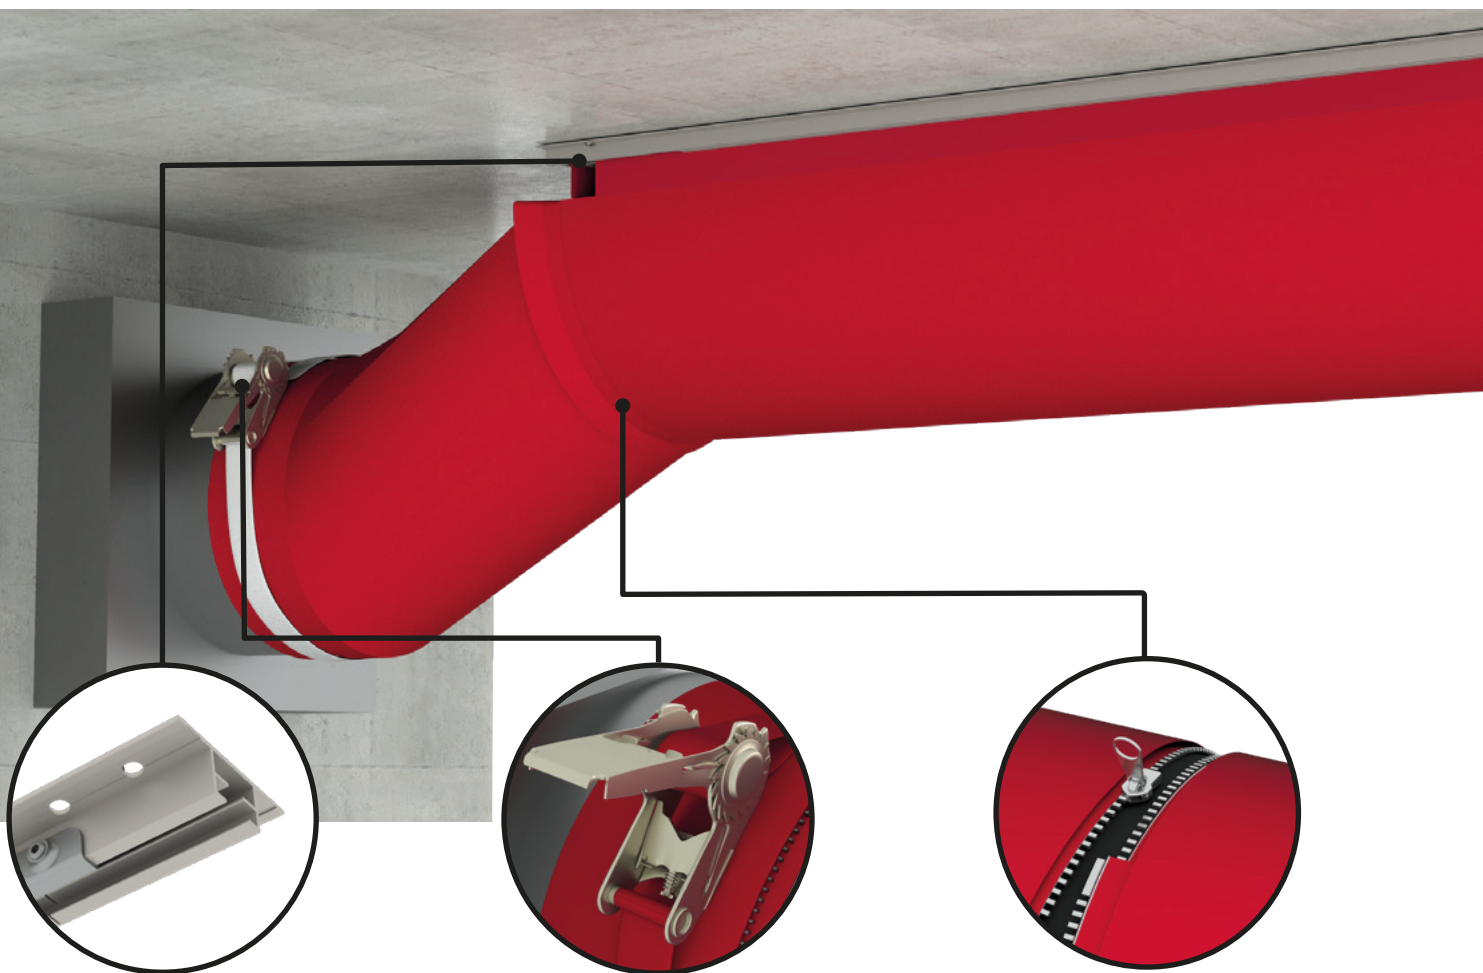




T-rail is attached directly to any type of ceiling, rather than being free-hanging. Type 11/11A provides closest distance between top of duct and ceiling.

Example of duct system configuration

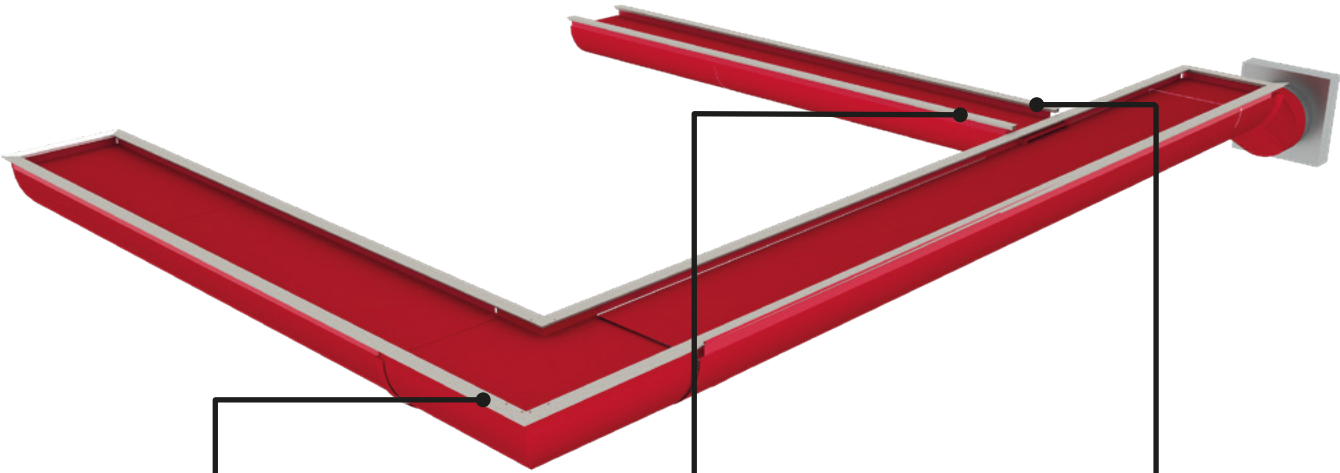



Elbows

We provide custom elbows in any degree and size.



Reductions

Concentric and eccentric reducers are available.



Branches

Concentric and eccentric branch take-offs are available.

T-RAIL for Type 11A

T-rail is produced in 2 meter sections using an extrusion process and then anodized, making it an excellent choice for corrosive environments. T-rail is primarily used in a two rail configuration to suspend D-shaped and semi-oval ducts, although it can also be used to mount a round ducts. The duct will have a RapidSlider which slides the channel from a side of T-Rail using special feeder part.

Type 11A RapidSlider

